

#### PRODUCT CATEGORY

## GREASE INTERCEPTOR

#### PRODUCT NAME

## HGT-200S

#### APPLICATION

## CENTRALIZED DRAINAGE

#### CAPACITY


## 200 GPM or 756 L/M

#### DESCRIPTION


HHC Grease Interceptors are installed in locations where liquid wastes containing grease. These devices are required to receive the drainage from fixtures and equipment with grease-laden wastes located in food preparation facilities. Fixtures and equipment include pot sinks, soup kettles or similar devices, wok stations, floor drains or sinks into which kettles are drained, automatic hood wash units, pre-rinse sinks, and dishwashers without grinders.

#### APPLICATION

- Restaurant Centralized Drainage
  - Kitchen Underground Drainage
  - Hospital or Institution
  - Small Size Food Court
  - Bars & Clubs
  - Food Court
  - Canteen
  - Dishes Washing Basin
  - Dishes Washing Machine
- \* Daily Serving Not More Than 4400 Meal**  
**\* Biomatic Grease Trap Convertible Ready**

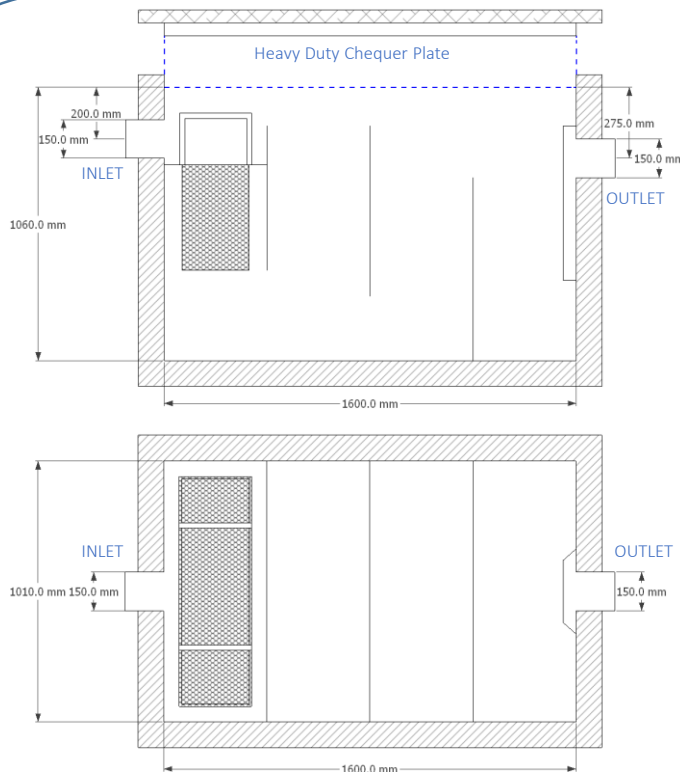

**SIZE: 1600MM (L) X 1010MM (W) X 1060MM (H)**



ENHANCED SEPARATION WITH NON-CLOGGING TUBE COALESER PACK (OPTIONAL)

TYPICAL DIMENSION